

10.4" COLOR TFT LCD Single-frequency sounder

SUZUKI

ES-1080

FFS (FLEX. FREQUENCY SYSTEM)

FIND FISH FASTER

with

SUZUKI ES-1080

for SHALLOW WATER PERFORMANCE!



for MIDDLE WATER PERFORMANCE!



- ▶ **FFS** provides easy retrofit of Echo sounder by using an existing transducer.
- ▶ Any user-selectable operating frequencies are available by changing a transducer only.

for DEEP WATER PERFORMANCE!



FEATURES

SUZUKI FLEX.FREQUENCY SYSTEM (FFS)

FFS permits an ideal operating frequency you need.

CLEAR-CUT ECHO DISPLAY


10.4" daylight-viewable, color LCD screen

VARIETY OF DISPLAY SETTINGS

User-selectable operating functions ;
GAIN CONTROL, TVG CURVE (GRAPH),
TRANSMIT RATE and PULSE WIDTH

USEFUL OPERATION MODES

The ES-1080 can be customized for 3 most frequently used modes.

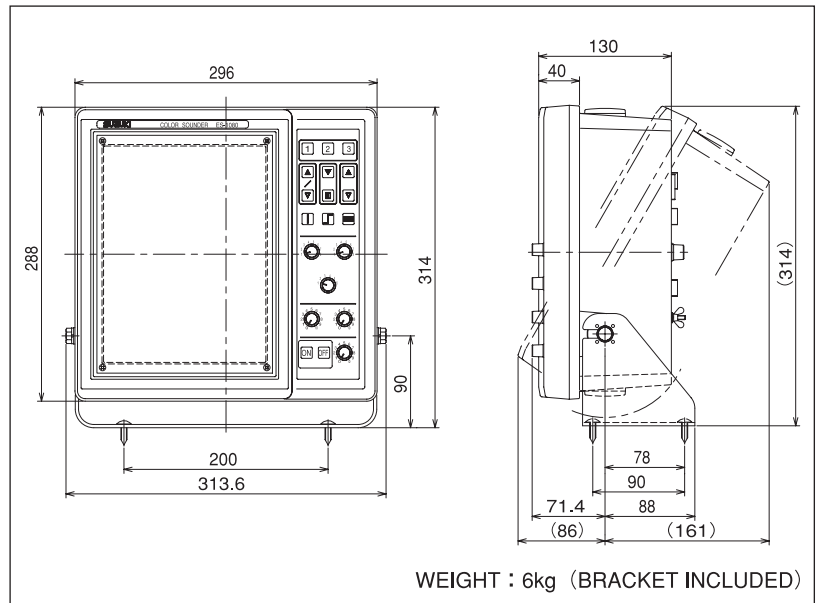

SPECIFICATIONS

■ RANGE PHASING	UP TO 999m, br. fm or 2999ft.
■ BASIC RANGES	CUSTOMIZED 7 RANGES
■ PART EXPANSION	CUSTOMIZED 8 RANGES PRESENTABLE (MAX 200m)
■ FREQUENCIES	20, 24, 28, 38, 40, 45, 49, 50, 60, 70, 75, 80, 150, 200kHz SINGLE FREQUENCY
■ DISPLAY MODE	① NORMAL DISPLAY ② BOTTOM EXPANSION DISPLAY (3 TYPES) + AUTO RANGE (SPLIT SCREEN DISPLAY) ③ PARTIAL EXPANSION DISPLAY (SPLIT SCREEN DISPLAY) ④ NAVIGATION DATA DISPLAY ⑤ RANGE SETTING/SOUNDER DISPLAY ⑥ FUNCTION SETTINGS/SOUNDER DISPLAY ⑦ COLOR PALETTE SET MENU (COLOR SCALE + SOUNDER)
■ DIGITAL DISPLAY	① DEPTH ② DEPTH SCALE ③ RANGE PHASING ④ EXPANSION START/VRM ⑤ TIMER ⑥ TEMP. & TEMP GRAPH* ⑦ LAT/LON* ⑧ SPEED* ⑨ COURSE*
■ FUNCTION SET DISPLAY	AUTO RANGE, AUTO SHIFT, PICTURE SPEED, INTERFERENCE REDUCTION, OPERATION MODE
■ ADDITIONAL DISPLAY	30 SECOND INTERVAL MARK, COLOR SCALE, EXPANSION MARK, MARKER LINE, TX POWER
■ OTHER FUNCTIONS	OPERATION MODE, A-SCOPE, FAR GAIN CONTROL, GAIN CONTROL, TVG CURVE, STC, D RANGE, TRANSMIT. INTERVAL CHANGE, PULSE WIDTH CHANGE (AUTO, MANUAL), COLOR SELECTION, INTERFERENCE REDUCTION, NOISE REDUCTION, JAMMING REDUCTION, CLUTTER CONTROL, THRESHOLD ADJUSTMENT, TEMP. ADJUSTMENT, WHITE LINE, DATA MEMORY, OUTER RANGE DISPLAY, DRAFT ADJUSTMENT, ALARMS (TEMP, DEPTH, FISH) SCALE CHANGE, PICTURE SPEED.
■ DATA INTERFACE -INPUT-	WATER TEMP. SENSOR (OP-102, NMEA-0183 <MTW>)*, NAVIGATIONAL DATA (NMEA-0183)*, EXTERNAL SOUNDER*
■ DATA INTERFACE -OUTPUT-	DEPTH DATA (NMEA-0183)*, WATER TEMP. DATA (NMEA-0183)*, MARKER (TLL)*, EXTERNAL SOUNDER*
■ SCREEN	10.4 INCH COLOR TFT LCD MONITOR with a resolution of 480 (H) × 640 (V) pixels
■ POWER SUPPLY	10.5 ~ 40VDC, Power consumption 45W

* optional quipment is required.

* Specifications are subject to change without notice.



For safe using, be sure to read the
"Operation Manual" before using this model.

If you would like to know more about our products
please contact...

SUZUKI FISH FINDER CO., LTD.

Head Office 12-1, Mamizuka-cho, Toyohashi-city, Aichi-pref,
441-8007 Japan
Phone (81) 532-32-7511 Fax (81) 532-32-7500
e-mail address: sales@suzukiff.co.jp
URL: <http://www.suzukiff.co.jp/>

© Colors used in this catalogue are subject to differ from actual colors.